


BENCH GRINDERS

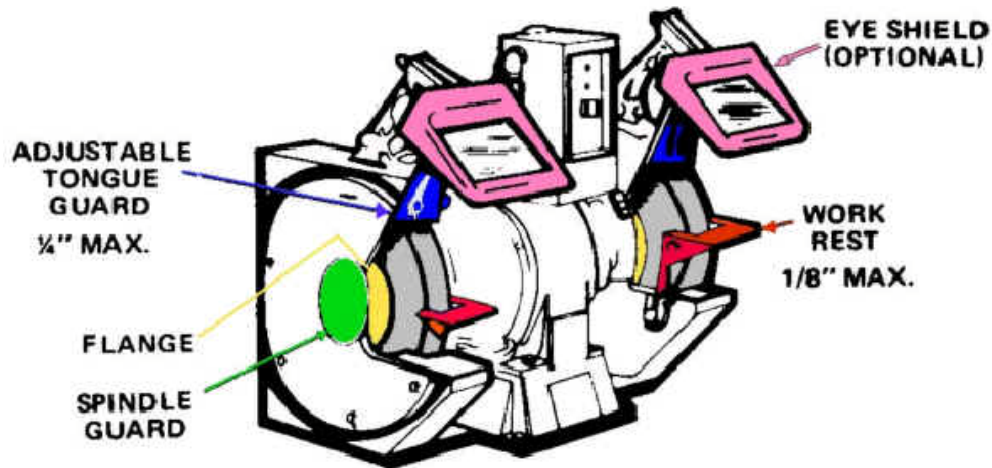

BENCH GRINDER SAFETY CHECKLIST		YES	NO
1.	Do side guards cover the spindle, nut and flange and 75% of the wheel diameter?		
2.	Is the work rest used and kept adjusted to within 1/8-inch (0.3175cm) of the wheel?		
3.	Is the adjustable tongue guard on the top side of the grinder used and kept to within 1/4-inch (0.6350cm) of the wheel?		
4.	Is the maximum RPM rating of each abrasive wheel compatible with the RPM rating of the grinder motor?		
5.	Before new abrasive wheels are mounted, are they visually inspected and ring tested?		
6.	Is cleanliness maintained around grinders?		
7.	Are dust collectors and powered exhausts provided on grinders used in operations that produce large amounts of dust?		
8.	Are goggles or face shields always worn when grinding?		
9.	Are bench and pedestal grinders permanently mounted?		
10.	Is each electrically operated grinder effectively grounded?		
11.	Are fixed or permanently mounted grinders connected to their electrical supply system with metallic conduit or other permanent method?		
12.	Does each grinder have an individual on and off control switch?		

This e-mail was produced by the Institute of Scrap Recycling Industries, Inc. For more information, visit us on the Web at www.ISRI.org
 For comments or suggestions about *For Your Safety*, e-mail joebateman@isri.org

March 30, 2010